

Colenta[®] Imageline Plate[®]

For AGFA SilverLithoStar CTP - Printing Plates
IMAGELINE PLATE - TYPE ILP 68/85 LS
Available in both Offline and Online options
for Heidelberg Prosetter 52/74/102



The Colenta Lithostar Processors are well proven and fully endorsed/accredited by Agfa as meeting their high standards in plate quality, reliability and production specifications. A copy of the Agfa accreditation is available on request.

The Agfa accreditation details the following features of the Colenta Lithostar design:

- * Approved for 300 / 75 sq/mt plates per day
- * A Robust design with ease of operation.
- * Fully compatible and adaptable „on-site“ to Concept 7 Lithostar Plate when available.
- * A sophisticated Control software monitors and manages the varying range of production conditions in respect to replenishment requirements (including standby and sleepmode replenishment) ensuring a stable plate developer and consistent good quality production.

Standard Features and accessories:


- In-built Chiller unit
- Prepared for Integrated Stacker
- Low Level monitoring of Dev, Wash, Rinse and Finisher Tank solutions.
- Automatic Solution Tank „Top-Up“ control on „Start-Up“
- High level monitoring in overflow collection tank (waste management)
- Low Level Replenishment Tank monitoring
- „Safe Loading“ control
- Re-Wash Feed Facility
- „Work in Progress“ monitoring
- Online Interface



HEIDELBERG
PROSETTER 52/74/102



COLENTA ILP 68-85 LS/OL

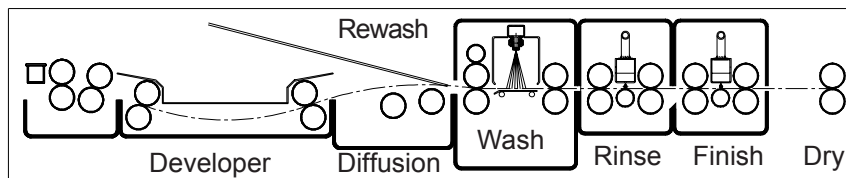

A drawer unit within the main frame to house the replenishment and waste collection tanks. (waste management)

Technical Specifications:

Processing applications:

Plate width:

Microprocessor Control:

Transport Speed at 20 sec DEV-Time:
(Time in Dev. plus Diffusion Time 20sec:)

AL-CTP AGFA SilverLithoStar
 max. 68 / 85 cm
 with 4 preprogrammable processing cycles
 and 1 overnight program (SLEEPMODE)
 170cm/min - 67 inch/min
 preprogrammable 16 to 80 sec.
 (recommended by AGFA 35sec/100cm/min)

	Tankcapacity ILP 68	Tankcapacity ILP 85	Temperature
Developer	12 lt	14,5 lt	15 - 45°C
Wash	11 lt	13,4 lt	18 - 55°C
Rinse	5 lt	5,9 lt	18 - 55°C
Finisher	5,5 lt	6,7 lt	18 - 55°C
Dryer	-	-	18 - 60°C
Electrical supply:	6KW	6KW	
at 3N-400/230V	13 A	13A	

(possible alternatives are available on request)

Weight:	Empty	350 kg	385 kg
	With solution	385 kg	425 kg




Technical specification subject to change without notice.

see additional
 Data sheet:
 G4-5 / G4-6
 G4-12 / G4-13

COLENTA LABORTECHNIK
 Ges.m.b.H. & Co. KG
 Neunkirchner Strasse 117
 A-2700 Wiener Neustadt
 Tel.: +43-2622-28311-0
 Fax: +43-2622-28311-7
 E-mail: office@colenta.at
<http://www.colenta.at>

Microprocessor
 controlled Display



ACI-COLENTA
 INTERNATIONAL Div.
 Forge Close, Little End Rd,
 Eaton Socon, Cambs. UK
 Tel. +44-1480-211118
 Fax: +44-1480-215236
 Fax: +44/870/132 1352
 E-mail: aci@patflaherty.com